

TCO SERIES HOT OIL TEMPERATURE CONTROL UNITS



STANDARD FEATURES

- *Simplified internal design to deliver more efficient heat transfer*
- *An off-the-shelf, DIN-style, auto-tuning PID fuzzy logic controller*
- *High-flow pumps with 18 to 24 gpm (68 to 90 lpm) capacities*
- *Easy-access cabinet design*
- *Compact footprint: 18 1/4" W x 42" D x 46" H (465mm W x 1065mm D x 1170mm H)*

Precise Temperature Control, Rugged Design

Engineered To Withstand the Rigors Of High-Temperature Heat Transfer

100°-550°F (40°-285°C) Operating Range

Immersion-Style Heaters

TrueTemp TCO Series Hot Oil Temperature Control Units from ACS Group • Walton/Stout provide highly accurate control for production applications requiring a continuous supply of high-temperature-controlled fluids.

A DIN-style, auto-tuning PID fuzzy logic controller monitors process temperature to cycle the heating/cooling process. This off-the-shelf controller ensures precise adherence to programmed temperature setpoints and carries a five-year warranty.

Units are available in 12kW, 18kW or 24kW configurations. Each provides consistent and reliable heating up to 550°F (285°C). To reduce energy consumption, a half heat/full heat feature is incorporated into the control circuit.

TrueTemp TCO Series Hot Oil Temperature Control Units feature an optional closed circuit heat exchanger for cooling in capacities from 3.9 to 6.7 sq. ft. (0.4 to 0.6 sq. m.). The "U" type heat exchanger design offers superior heat transfer and is highly resistant to thermal stress when cooling water enters the system. Changeable and replaceable tube bundles help to minimize maintenance.

ACS Group • Walton/Stout is committed to a continuing program of product improvement. Dimensions are subject to change without notice.

© 2009 ACS Group • Walton/Stout

Bulletin WHC1-140

Printed in USA


WS
ACS GROUP • WALTON/STOUT

ACS Group • Walton/Stout
2900 S. 160th Street
New Berlin, WI 53151

Phone: 262-641-8600
Fax: 262-641-8653
Email: waltonstout@waltonstout.com

www.waltonstout.com

TCO SERIES HOT OIL TEMPERATURE CONTROL UNITS

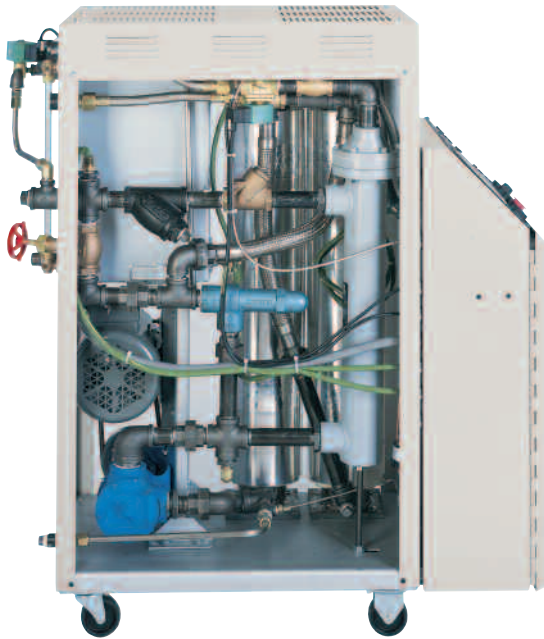

TRUETEMP TCO SERIES

- Vertically mounted pump available in 1 and 2 Hp (0.75 and 1.5 kW)
- Immersion-style heaters
- Half heat or full heat capability for tighter temperature control
- Easily removable side panels allow quick access to internal components
- Oil pressure switch
- Non-fused, lockable disconnect
- Easy-to-read graphic display control panel



Optional advanced controller

FEATURES

- Premium-efficiency, extended cycle cooling valves
- NEMA 12 electrical cabinet with branch fusing
- To-process pressure gauge
- Independent safety thermostat
- IEC contractors and motor starter
- Controls meet NFPA 70/79 standards

AVAILABLE OPTIONS

- Automatic Auto-Vent Sequence removes air from system to minimize oxidation
- Advanced controller (as shown above)
- Low level alarm
- Manual bypass
- 3.9- or 6.7-sq. ft (0.4 to 0.6 sq. m.) heat exchanger
- NEMA-4/4x enclosure/entire unit
- Drain valve
- Hour meter
- Audible/visual alarms
- Pulse cooling
- Leak detection circuit
- Communications - RS485/SPI, RS232 or 485/GEN
- Multi-port manifold
- Other off-the-shelf DIN PID controllers
- Remote mountable controls
- Lexan® cover

ACS Group • Walton/Stout is committed to a continuing program of product improvement. Dimensions are subject to change without notice.

© 2009 ACS Group • Walton/Stout

Bulletin WHC1-140

Printed in USA

WST

ACS GROUP • WALTON/STOUT

ACS Group • Walton/Stout
2900 S. 160th Street
New Berlin, WI 53151

Phone: 262-641-8600
Fax: 262-641-8653
Email: waltonstout@waltonstout.com

www.waltonstout.com